



**VIEWING CENTER
MC9002**


REV. 1
8/10/2015

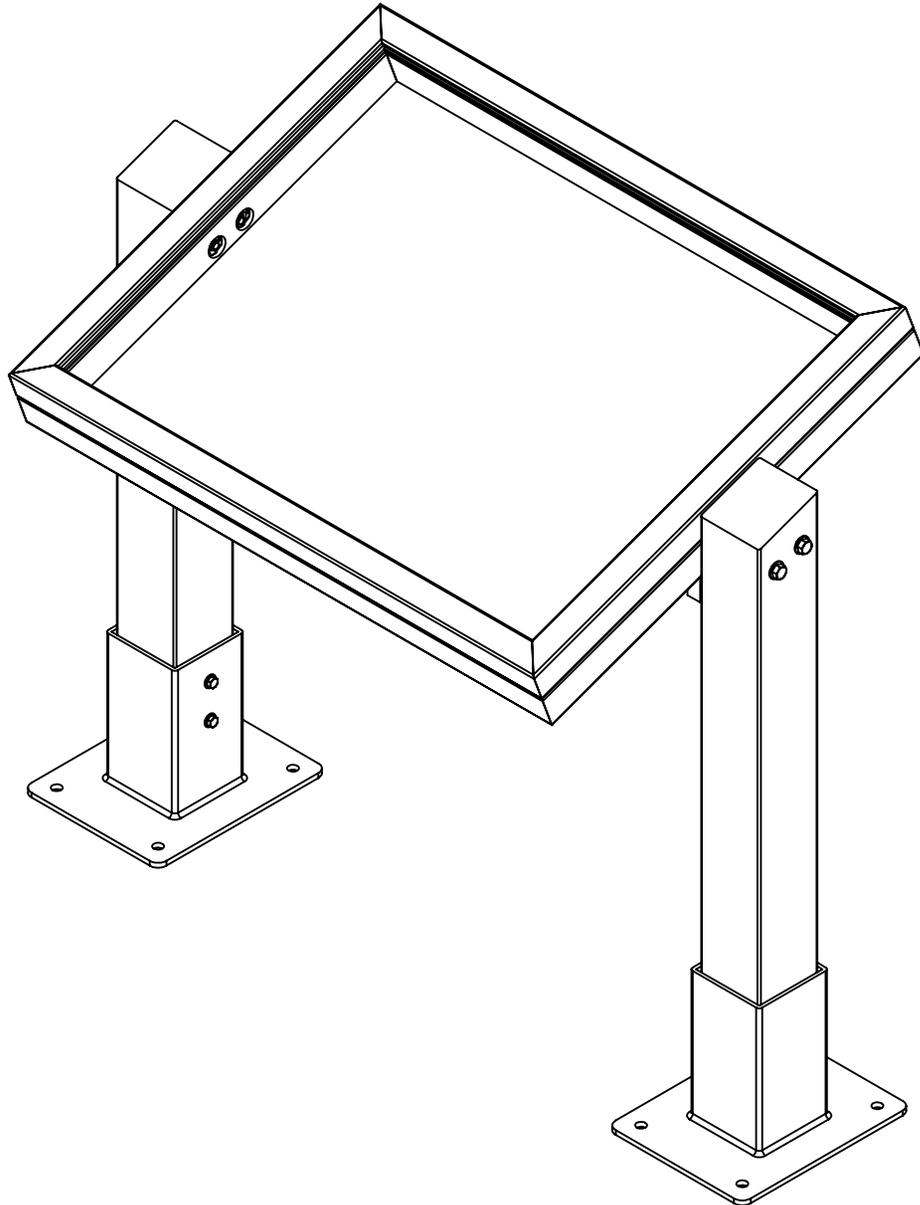


VIEWING CENTER MC9002

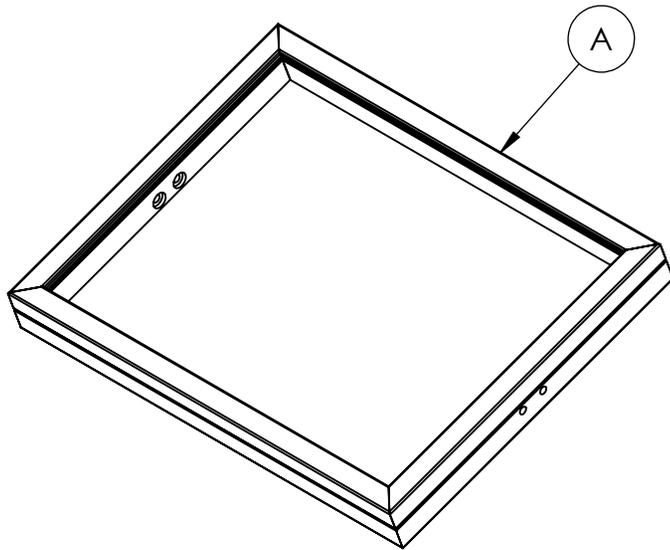

1
Viewing Center

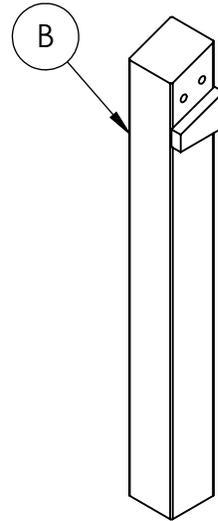

2
Posts




2
Surface Mount Bases


REQUIRED TOOLS (NOT INCLUDED)

- 1 - 7/16" SOCKET
- 1 - 9/16" SOCKET


HARDWARE

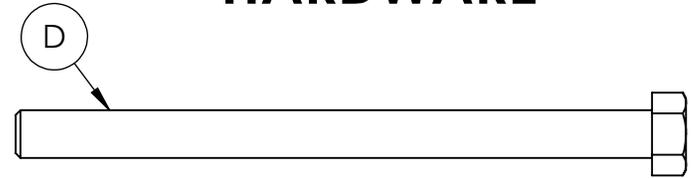


4
3/8" x 5" Hex Head Bolt



4
3/8" Flat Washer



4
1/4" x 1.5" Lag Screw




4
1/4" Flat Washer

**COMPONENTS &
TOOLS REQUIRED
FOR ASSEMBLY**

1/4

VIEWING CENTER MC9002

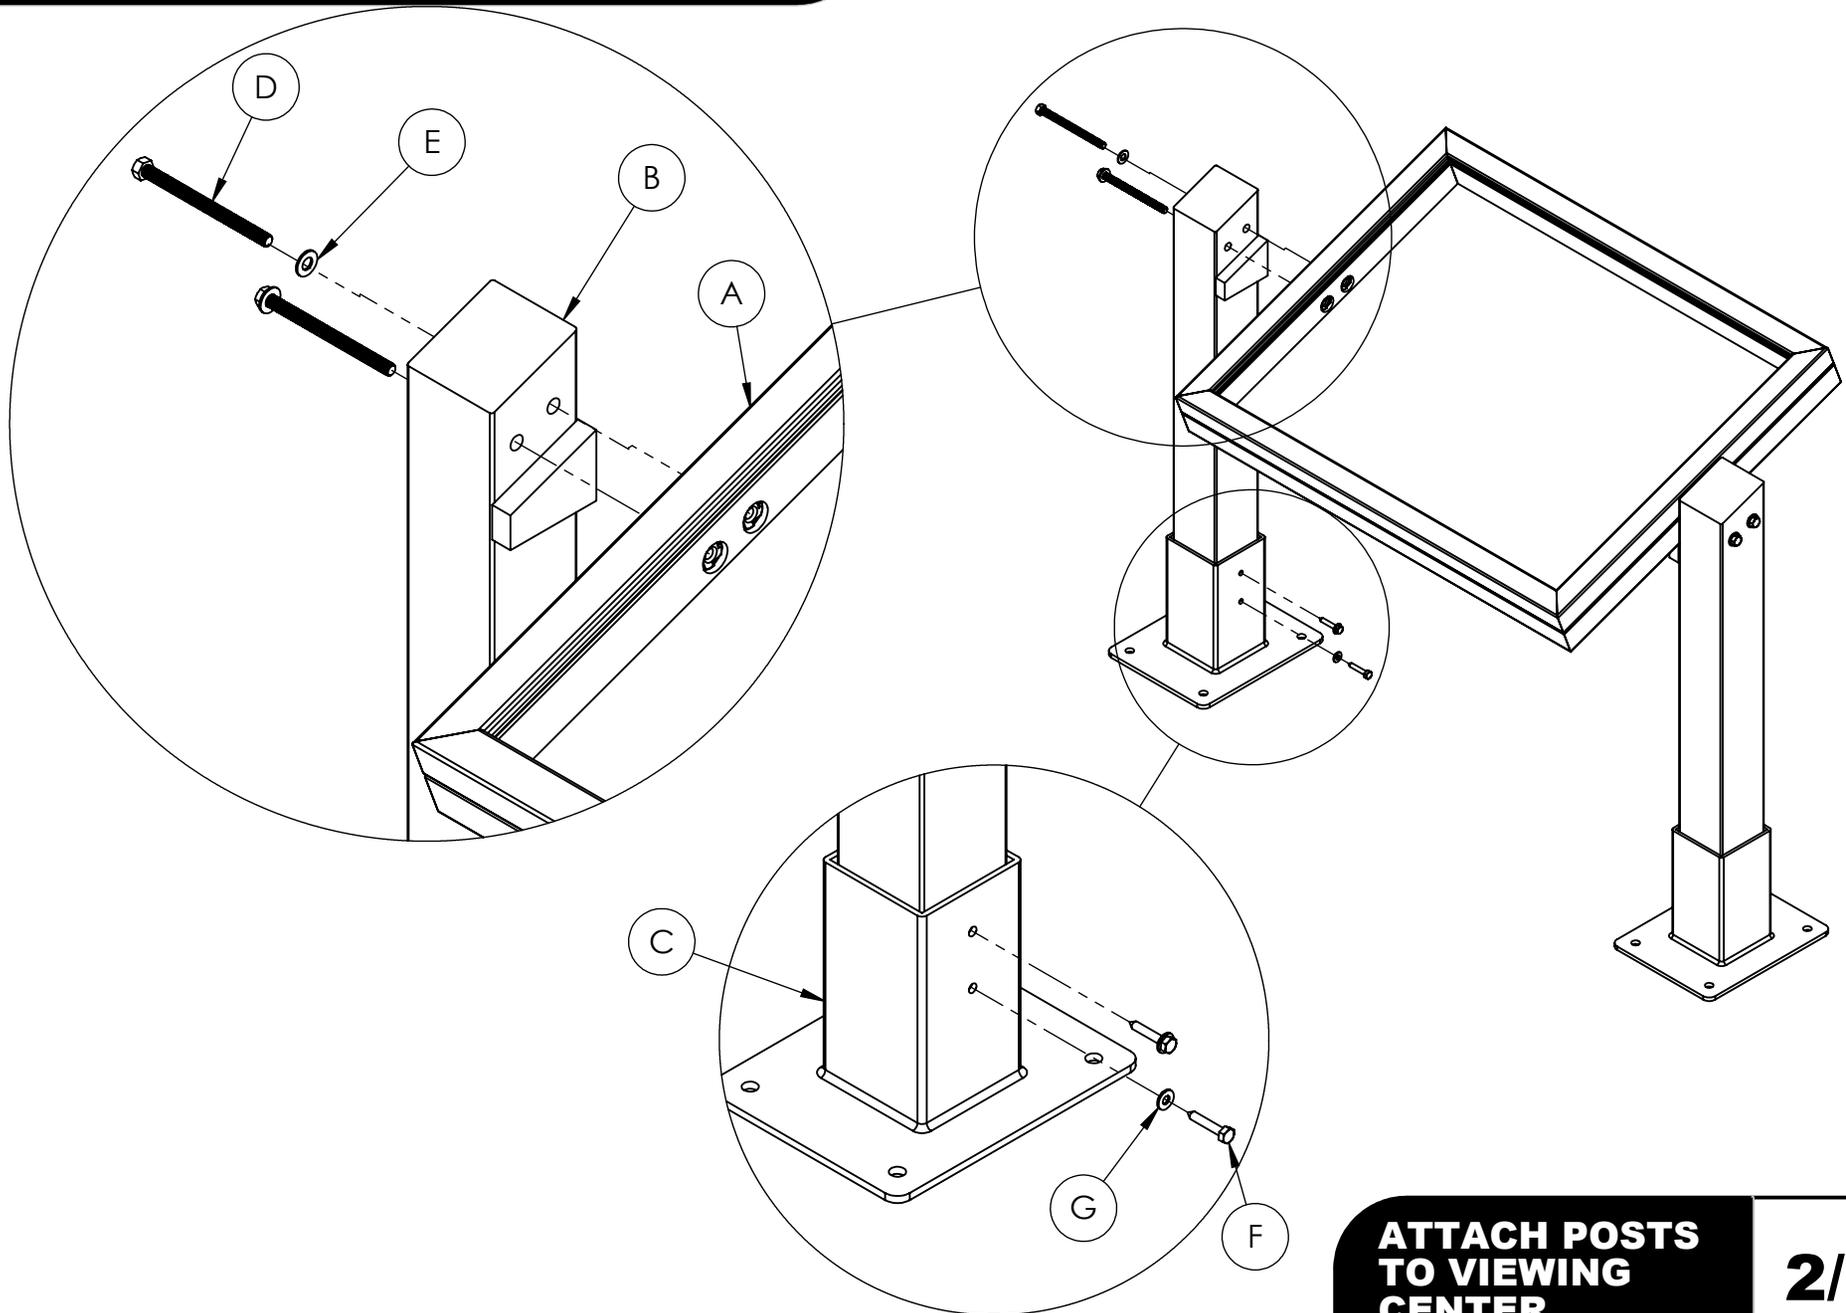

**ATTACH POSTS
TO VIEWING
CENTER**


2/4

REMOVE GLASS COVERING

REMOVE GLASS COVERING


- Take a razor blade and score as close as possible to the frame, cutting the covering
- In a corner, peel back the the covering using the point of the knife blade
- Pull the covering off the glass
- Repeat for the other side

Frame edge

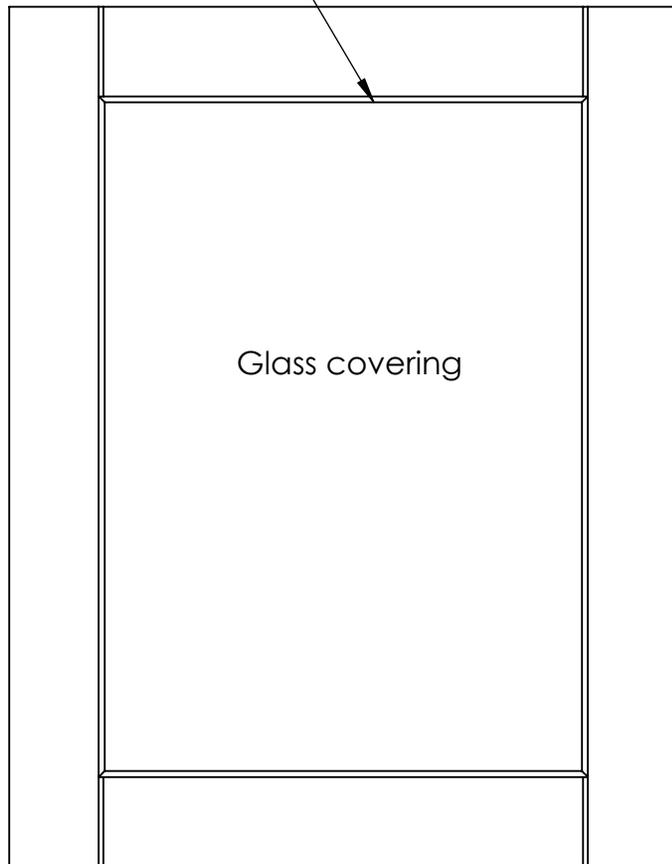

Glass covering

Score along thick line
with a razor blade

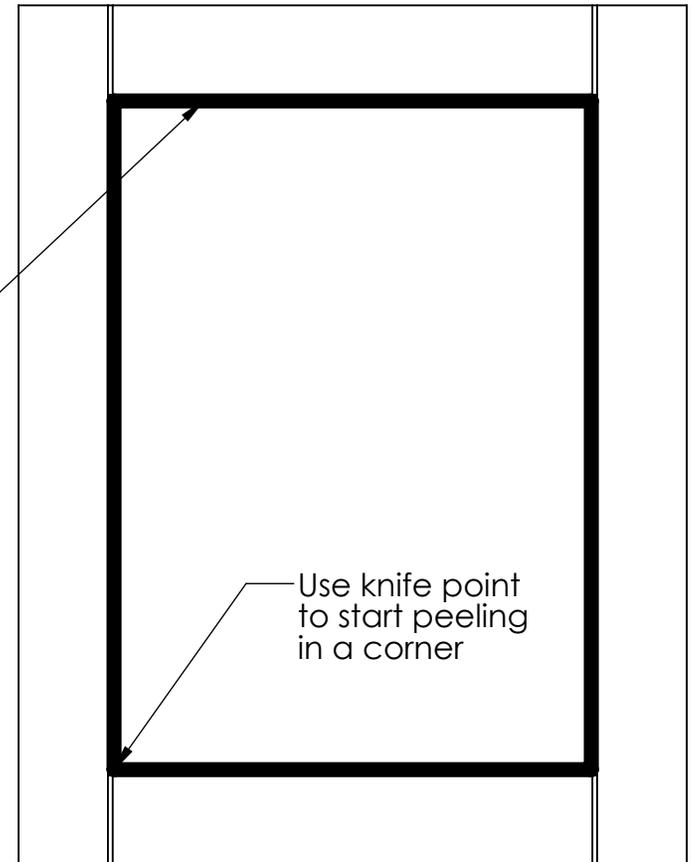

Use knife point
to start peeling
in a corner

SPECIFICATIONS

