




**INGROUND MOUNT** 

SURFACE MOUNT

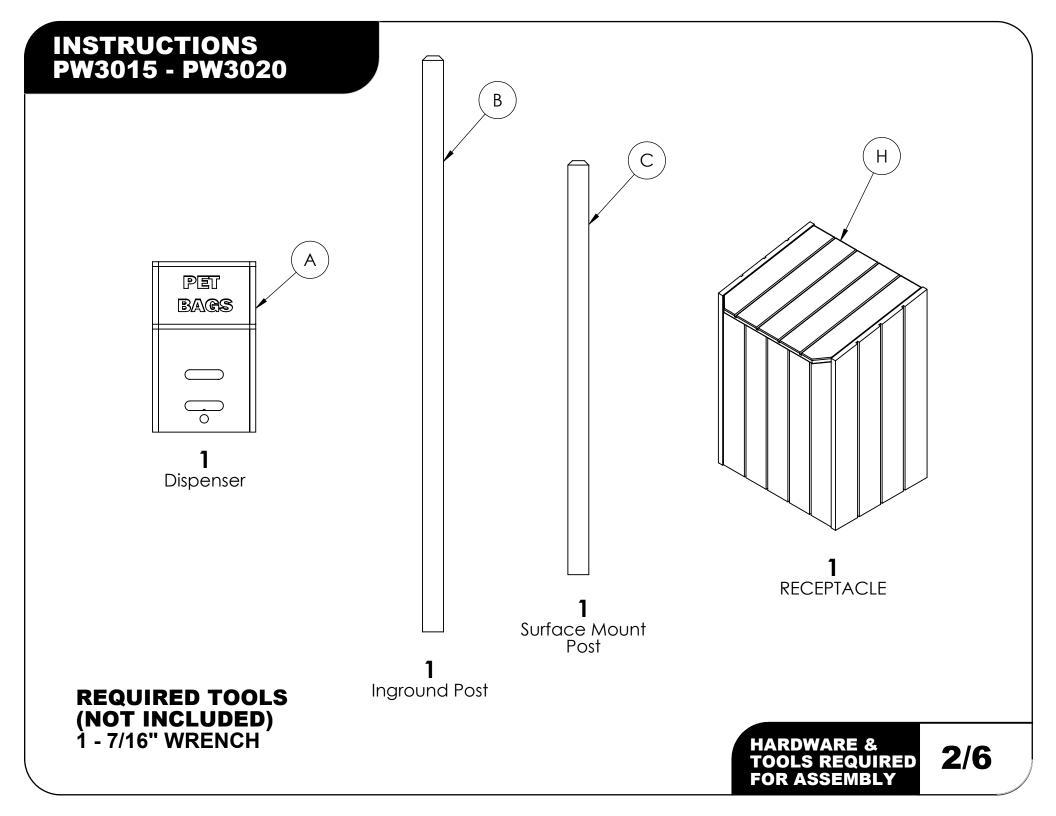

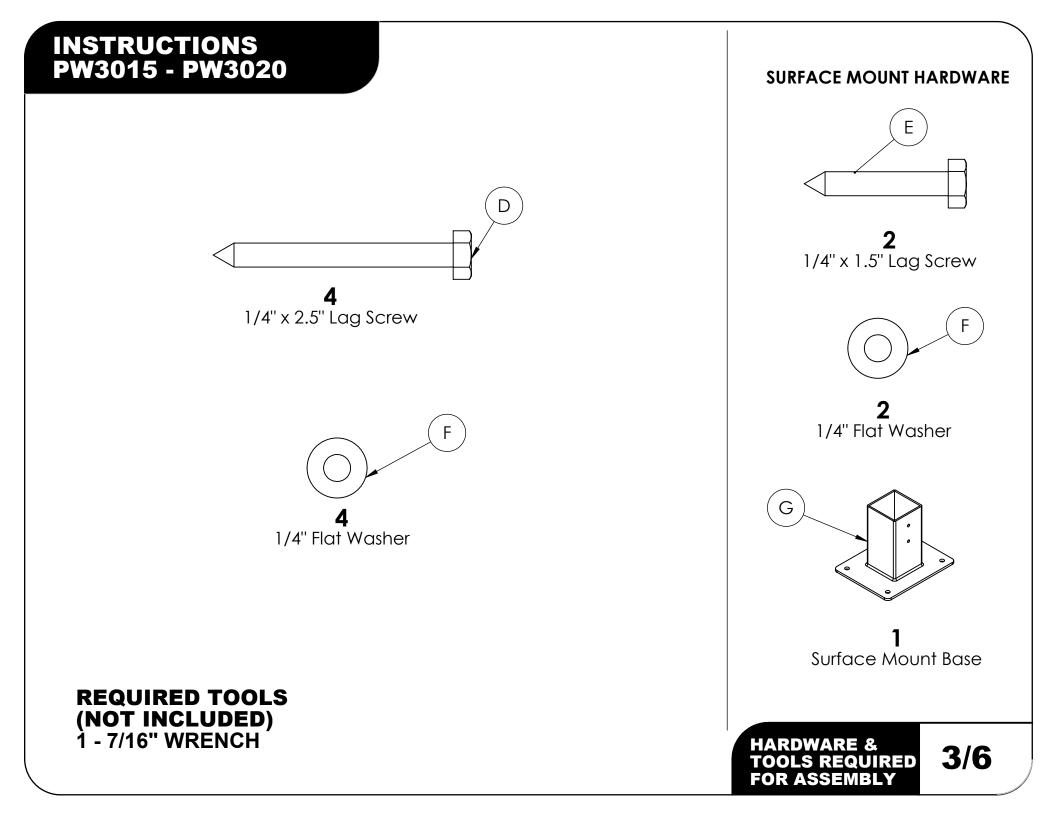

- Mount the Receptacle
  Locate the the predrilled pilot holes toward the bottom of the inground mount post (B)
  Align the pilot holes in the post with the predrilled holes in the receptacle (H)
  Secure the receptacle to the post with two 1/4" x 2.5" lag screws (D) and flat washers (F)

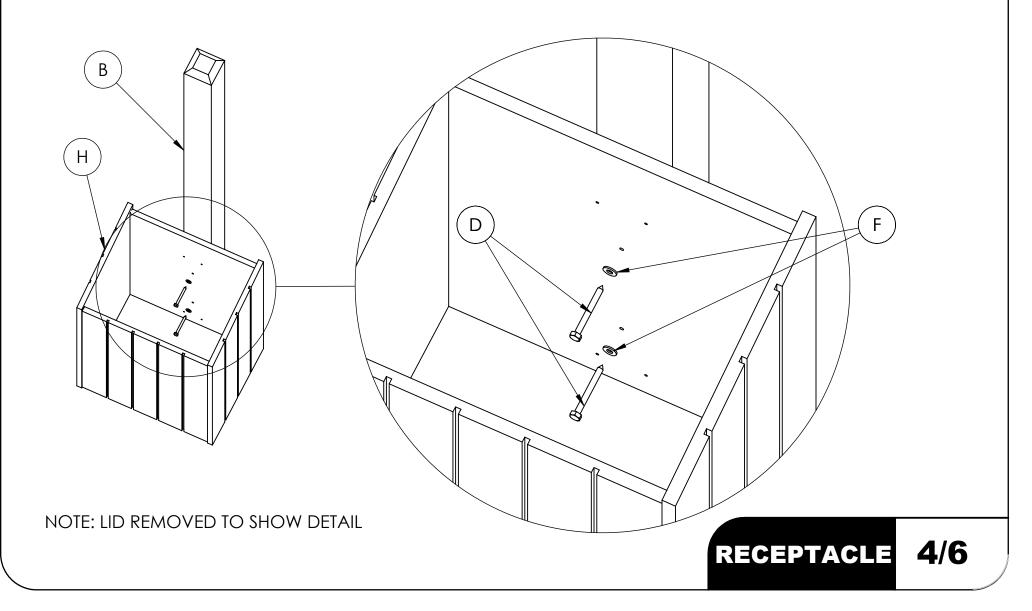


#### Inground Mount


- Dig a hole 12 inches in diameter to a depth of 20 to 30 inches
- The receptacle can sit on the ground or above . the ground if desired
- Insert the inground mount post (B) into the hole Level the post with the ground Pour concrete into the hole and allow to set .
- ٠
- ٠

### Surface Mount

- Insert the post (C) into the surface mount base(G)
- Secure the post to the base with 2.25" x 1.5" lag screws (E) and washers (F) provided
- Place the post upright in desired location •
- Square the post assembly to the ground •
- Attach the surface mount base to the ground • using approiate hardware (not included)

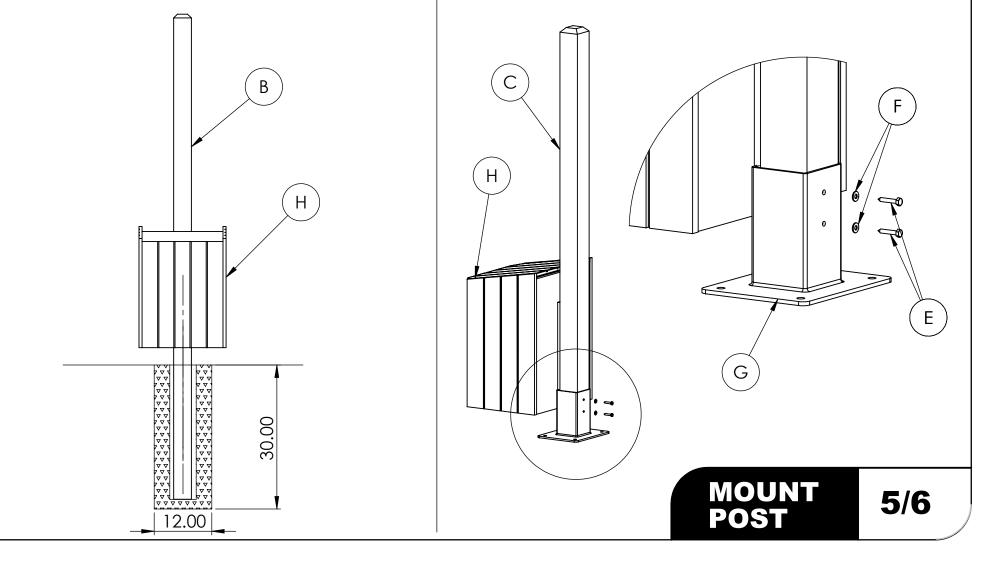

- Attach the Dispenser
  Align the predrill holes in the dispenser with the predrilled holes in the post
  Secure the dispenser to the post with two 2.5" lag screws (D) and washers(F)

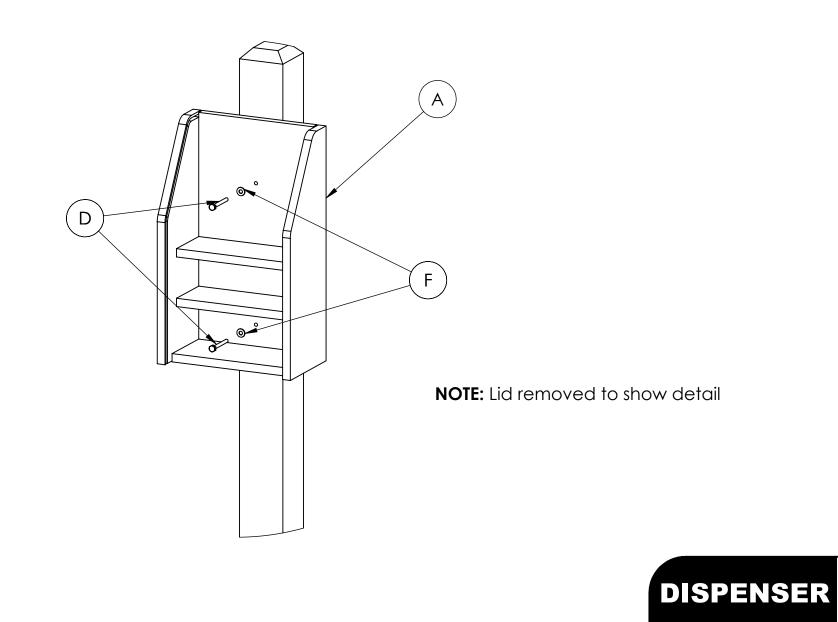

6/6

### PW3015-PW3020

#### NOTE: ALL MATERIAL IS RECYCLED PLASTIC LUMBER UNLESS NOTED ALL DIMENSIONS SHOWN IN INCHES

